

Flow Cells for Variable Temperature Cell Holder & Heating Jackets

Please note :- In order to use the flow cells in the Variable Temperature Cell holder (GS21525) the flow option kit GS20080 must be fitted.

ordering information

GS20560* NaCl Sealed Heatable Liquid Cell with 1/16" Swagelok fittings for flow purposes. (Specify pathlength from 0.025, 0.05, 0.1, 0.2, 0.5 and 1.0mm)

GS20561* KBr Sealed Heatable Liquid Cell with 1/16" Swagelok fittings for flow purposes. (Specify pathlength from 0.025, 0.05, 0.1, 0.2, 0.5 and 1.0mm)

GS20562* CaF₂ Sealed Heatable Liquid Cell with 1/16" Swagelok fittings for flow purposes. (Specify pathlength from 0.025, 0.05, 0.1, 0.2, 0.5 and 1.0mm)


GS20563* BaF₂ Sealed Heatable Liquid Cell with 1/16" Swagelok fittings for flow purposes. (Specify pathlength from 0.025, 0.05, 0.1, 0.2, 0.5 and 1.0mm)

GS20566* ZnSe Sealed Heatable Liquid Cells with 1/16" Swagelok fittings for flow purposes. (Specify pathlength from 0.025, 0.05, 0.1, 0.2, 0.5 and 1.0mm)

GS20590* NaCl Demountable Heatable Liquid Cells with 1/16" Swagelok fittings for flow purposes (Specify pathlength from 0.006, 0.012, 0.025, 0.05, 0.1, 0.2, 0.25, 0.5 and 1.0mm)

GS20591** KBr Demountable Heatable Liquid Cells with 1/16" Swagelok fittings for flow purposes (Specify pathlength from 0.006, 0.012, 0.025, 0.05, 0.1, 0.2, 0.25, 0.5 and 1.0mm)

GS20592** CaF₂ Demountable Heatable Liquid Cells with 1/16" Swagelok fittings for flow purposes (Specify pathlength from 0.006, 0.012, 0.025, 0.05, 0.1, 0.2, 0.25, 0.5 and 1.0mm)

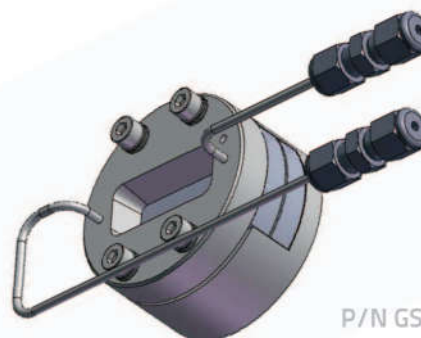

P/N GS20560/90

Key features

- > Choice of pathlength
- > Sealed or demountable cells
- > Variety of window materials
- > Flow mode

GS20593** BaF₂ Demountable Heatable Liquid Cells with 1/16" Swagelok fittings for flow purposes (Specify pathlength from 0.006, 0.012, 0.025, 0.05, 0.1, 0.2, 0.25, 0.5 and 1.0mm)

GS20594** ZnSe Demountable Heatable Liquid Cells with 1/16" Swagelok fittings for flow purposes (Specify pathlength from 0.006, 0.012, 0.025, 0.05, 0.1, 0.2, 0.25, 0.5 and 1.0mm)

Heatable Flow Cell

GS20569 Heatable Liquid Flow Cell ESK



* Includes a complete cell with front flow plate, top lead gasket, top window, lead spacer and bottom window all sealed together.

** Includes a complete cell with front flow plate, top PTFE gasket, top window, PTFE or Mylar spacer (choice of pathlengths) and bottom window that can be separated from each other.